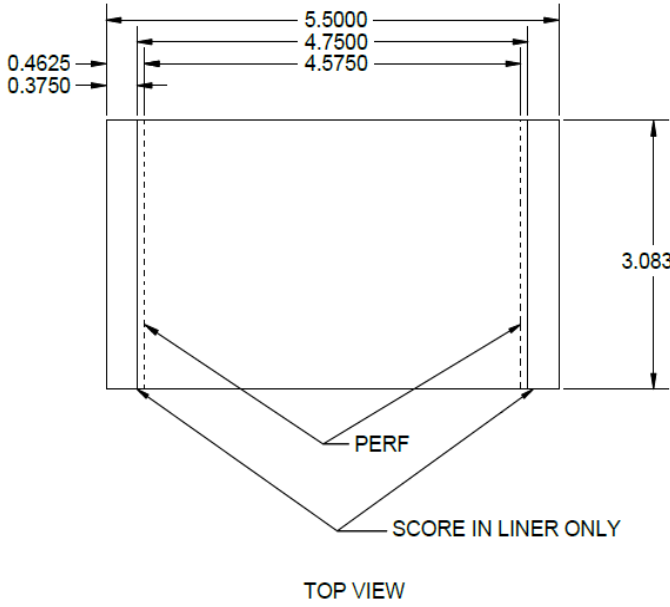


Part Number(s): **SF-UC-500**

Description: **Ultra clear, pressure sensitive optically clear sealing film for real-time (q)PCR**

Specifications:

Dimensions	 TOP VIEW
Tolerances	Overall Length X Width: +/- 0.0313"

Composition

	Film	Adhesive	Liner
Color	Optically clear	Clear	White
Material	Polypropylene polyolefin film	Pressure-sensitive silicone adhesive	Fluoro-silicone coated polyester release liner
Thickness	2 mil (51 µm)	2 mil (51 µm)	2 mil (51 µm)
Operational temperature	-80°C to +105°C		

Features and Benefits

Delayed tack adhesive
Transparent, optically clear
Low autofluorescence
Designed specifically for real-time PCR

Quality	
DNase free	Yes
RNase free	Yes
Non-pyrogenic	Yes

Storage
Protect from direct sunlight and UV light
Store dry at 21°C
Designed for single use in PCR thermocyclers

Bovine Spongiform Encephalopathy (BSE) and Transmissible Spongiform Encephalopathy (TSE):

None of these products or raw materials are manufactured from or come into contact with animal material.